


HGP braided hose

polyester

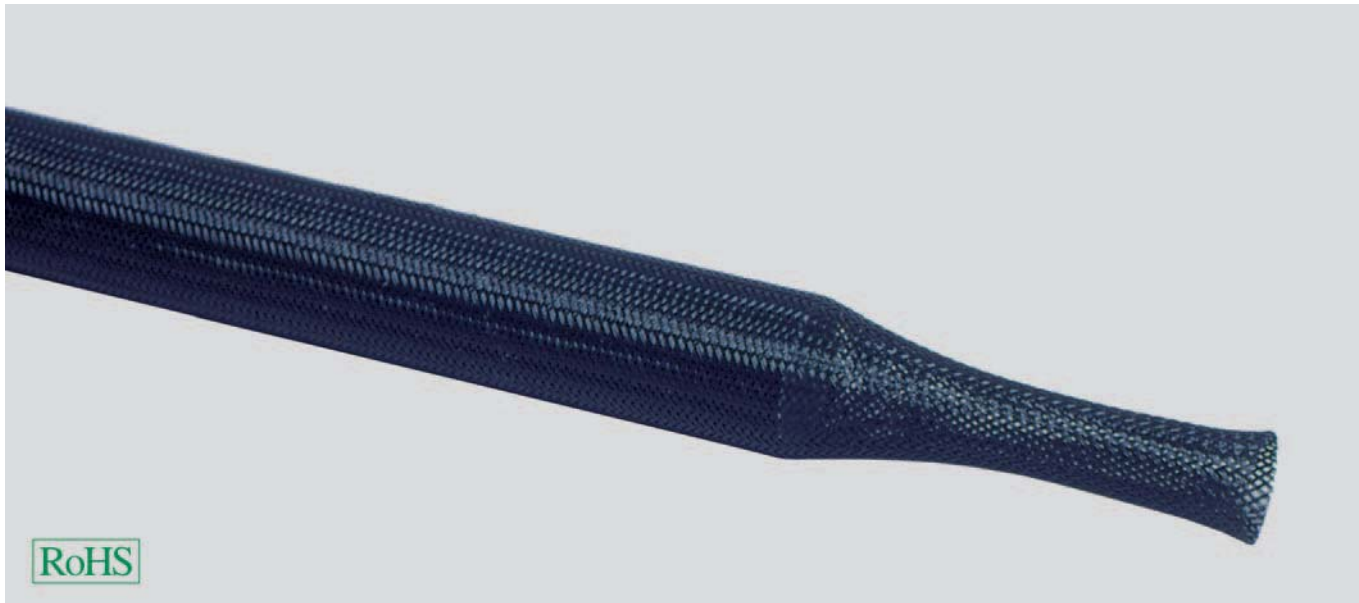

HGP

The polyester braided sleeve for directionality and for the mechanical protection of electrical cables and lines.

Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

Material

Polyester

- halogen-free

Properties

Axially compressible

Technical data

Temperature range: -50°C up to +150°C
Temperature range temporary up to +220°C

Polyester

| Part no. grey | Part no. black | Min. inner Ø mm | Max. inner Ø mm | Per metres | Net EUR/100 metres at a purchase of | | |
|------------------|-------------------|--------------------|--------------------|---------------|-------------------------------------|-----------|------------|
| | | | | | up to 100 | 101 - 500 | 501 - 1000 |
| 94900 | 98136 | 1,0 | 5,0 | 100,0 | o. r. | o. r. | o. r. |
| 94901 | 98137 | 2,0 | 7,0 | 100,0 | o. r. | o. r. | o. r. |
| 94902 | 98138 | 3,0 | 9,0 | 100,0 | o. r. | o. r. | o. r. |
| 94903 | 98139 | 4,0 | 11,0 | 100,0 | o. r. | o. r. | o. r. |
| 94904 | 98140 | 5,0 | 12,0 | 100,0 | o. r. | o. r. | o. r. |
| 94905 | 98141 | 7,0 | 15,0 | 100,0 | o. r. | o. r. | o. r. |
| 94906 | 98142 | 8,0 | 17,0 | 50,0 | o. r. | o. r. | o. r. |
| 94907 | 98143 | 10,0 | 20,0 | 50,0 | o. r. | o. r. | o. r. |
| 94908 | 98144 | 14,0 | 26,0 | 25,0 | o. r. | o. r. | o. r. |
| 94909 | 98145 | 18,0 | 34,0 | 25,0 | o. r. | o. r. | o. r. |
| 94910 | 98146 | 20,0 | 40,0 | 25,0 | o. r. | o. r. | o. r. |
| 94911 | 98147 | 30,0 | 50,0 | 25,0 | o. r. | o. r. | o. r. |
| 94912 | 98148 | 40,0 | 66,0 | 25,0 | o. r. | o. r. | o. r. |

Dimensions and specifications may be changed without prior notice.

o. r. = on request